




**TRADITIONAL
SAND-CEMENT SCREED**



**Automatic equipment for the mixing and
pumping of Screed and lightweight subfloors**

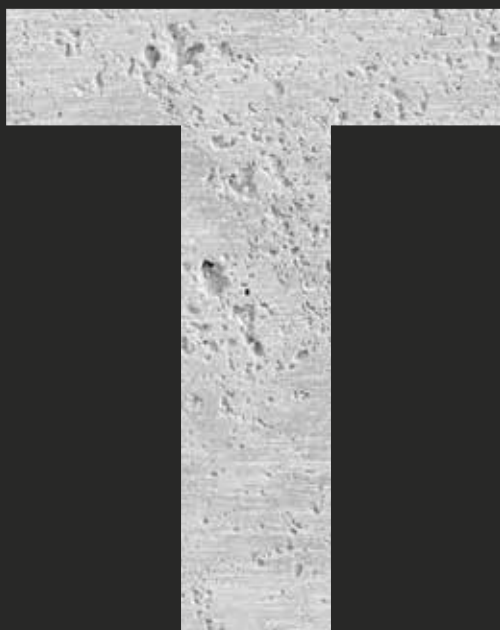

SERIES



FOR TRADITIONAL SAND-CEMENT SCREED



MSA	9.4 T PTO	13.4 TD	15.5 T PTO	20.6 T PTO	20.6 T R	24.7 T R	20 TP PTO
Sand volume	9 m ³	13 m ³	15 m ³	20 m ³	20 m ³	24 m ³	20 m ³ pre-mixed screed
Cement volume	4 m ³	4 m ³	5 m ³	6 m ³	6 m ³	7 m ³	
Mixer vessel	270 lt	270 lt	270 lt	270 lt	270 lt	270 lt	270 lt
Production ^{*1}	Up to 6 m ³ /h	Up to 6 m ³ /h	Up to 6 m ³ /h	Up to 6 m ³ /h	Up to 6 m ³ /h	Up to 6 m ³ /h	Up to 6 m ³ /h
Pumping height ^{*1}	100 m	100 m	100 m	100 m	100 m	100 m	100 m
Pumping distance ^{*1}	150 m	150 m	150 m	150 m	150 m	150 m	150 m
Vehicle	3-axle truck	4-axle truck	4-axle truck	5-axle truck	3-axle trailer	3-axle trailer	4-axle truck
Driving	Truck PTO	Deutz TCD 3.6 L4 85kW @ 2200 rpm	Truck PTO	Truck PTO	Deutz TCD 3.6 L4 85kW @ 2200 rpm	Deutz TCD 3.6 L4 85kW @ 2200 rpm	Truck PTO
Compressor ^{*2}	6.100 lt @ 10 bar	6.100 lt @ 10 bar	6.100 lt @ 10 bar	6.100 lt @ 10 bar	6.100 lt @ 10 bar	6.100 lt @ 10 bar	6.100 lt @ 10 bar
Tare ^{*3}	5,5 ton ^{*4}	7,5 ton ^{*4}	6,5 ton ^{*4}	7,5 ton ^{*4}	13,5 ton	14 ton	6 ton ^{*4}

(^{*1}) According to the material and formula used.

(^{*2}) By screw pump.

(^{*3}) Tare, dimensions and weights vary according to the set-up.


(^{*4}) Vehicle excluded.

On demand configurable as Plug-in Hybrid version
On demand configurable as Battery Full-Electric version




Overmat **T-series** equipment are the ideal solution for the production of **traditional and premixed traditional screeds**. Thanks to their **powerful software** it is possible to **accurately dose all bulk materials stored in the machine**, from inert materials with different grain size, to binders, fibres and liquid, gel or powder **additives**.


They are compact and have an **extremely low gravity centre**, thanks to the **lifting mixer vessel** which remains protected while driving on the road. They allow to obtain all products required by customers.

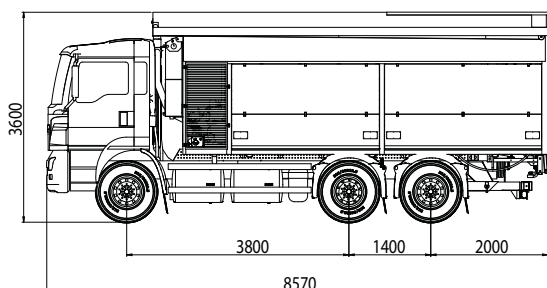


MSA 9.4 TPTO

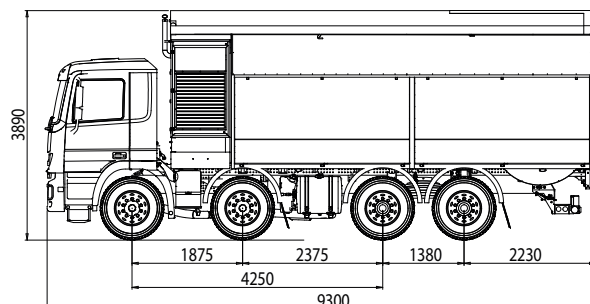


MSA 13.4 TD

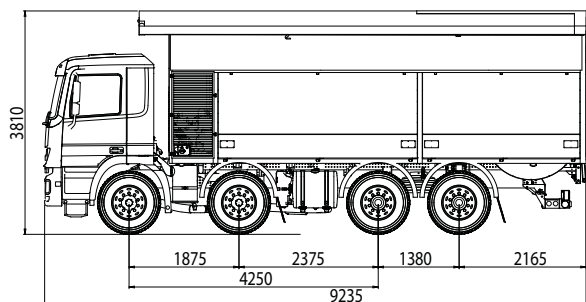


MSA 15.5 PTO

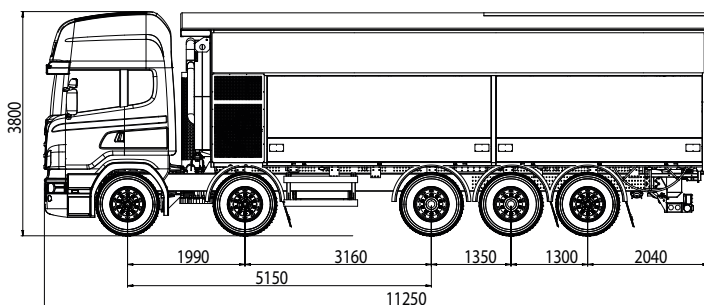


MSA 20.6 T PTO

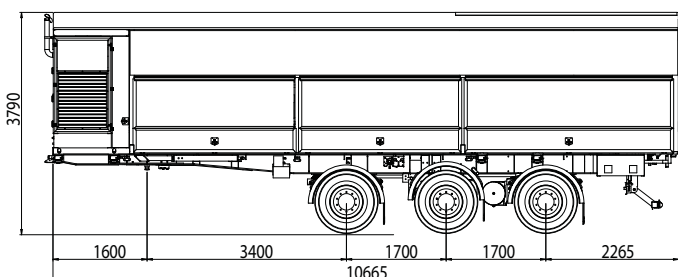

MSA 20.6 TR

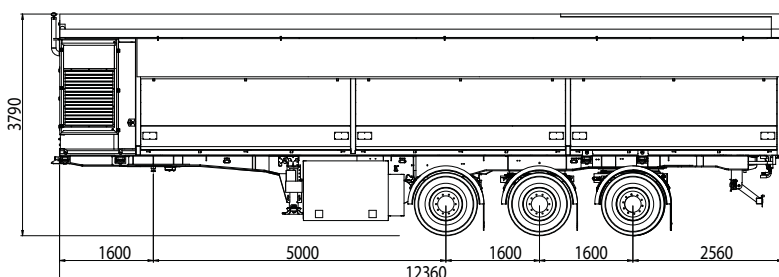


MSA 24.7 TR

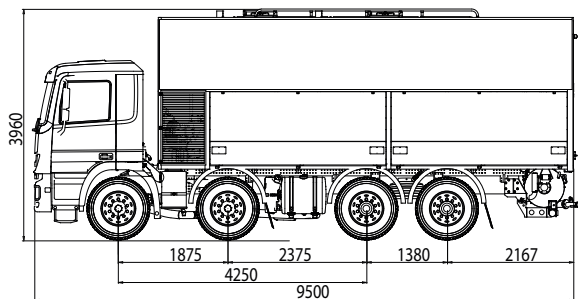

MSA 20 TP PTO

MSA 20 TP PTO is an equipment for the production of premixed traditional screeds. It is built with a single 20 m³ silo for the storage of premixed sand-cement screed.





Legal Headquarters

via Campardone, 7 Z.I.
31014 Colle Umberto (TV)
Italia

Operational Headquarters

Via Vittorio Veneto, 20
31014 Colle Umberto (TV)
Italia

Contact Us

+39 0438 434443

info@overmat-screed.com

Follow Us



@Overmat



@overmat_screed



@OVERMAT



@overmat_screed